



SINCE 1998



2024/25

**SMARTER
LIGHTING
CHOICES**



An extensive range of LED Battens and LED interior Linear Profiles, with a wide selection of colours and installation choices.



BLADE SL9707 TC - 20W/35W

LED low profile batten, with selectable CCT.

Application

Conventional LED profile battens for commercial service spaces

Design Specifications

- Selectable CCT 3000K / 4000K / 5700K
- Extruded aluminium body profile with a rear cable channel for easy wiring access
- White powder coat finish
- Integral constant current non-dimmable LED driver, 20 or 30 or 35 watt
- Robust opal polycarbonate diffuser
- High efficiency LED optics, CRI >80, 120° beam distribution


Performance

- Non-dimmable




Photometric Data

Unit: cd C0/C180 — C90/C270

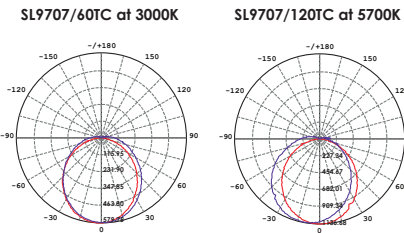

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimension L x W x H (mm)
SL9707/60TC	240/50	20	2600/2800/2800	3000/4000/5700	120°	White	597 x 80 x 35
SL9707/120TC	240/50	30	4200/4500/4500	3000/4000/5700	120°	White	1197 x 80 x 35
SL9707/150TC	240/50	35	4800/5100/5100	3000/4000/5700	120°	White	1485 x 80 x 35

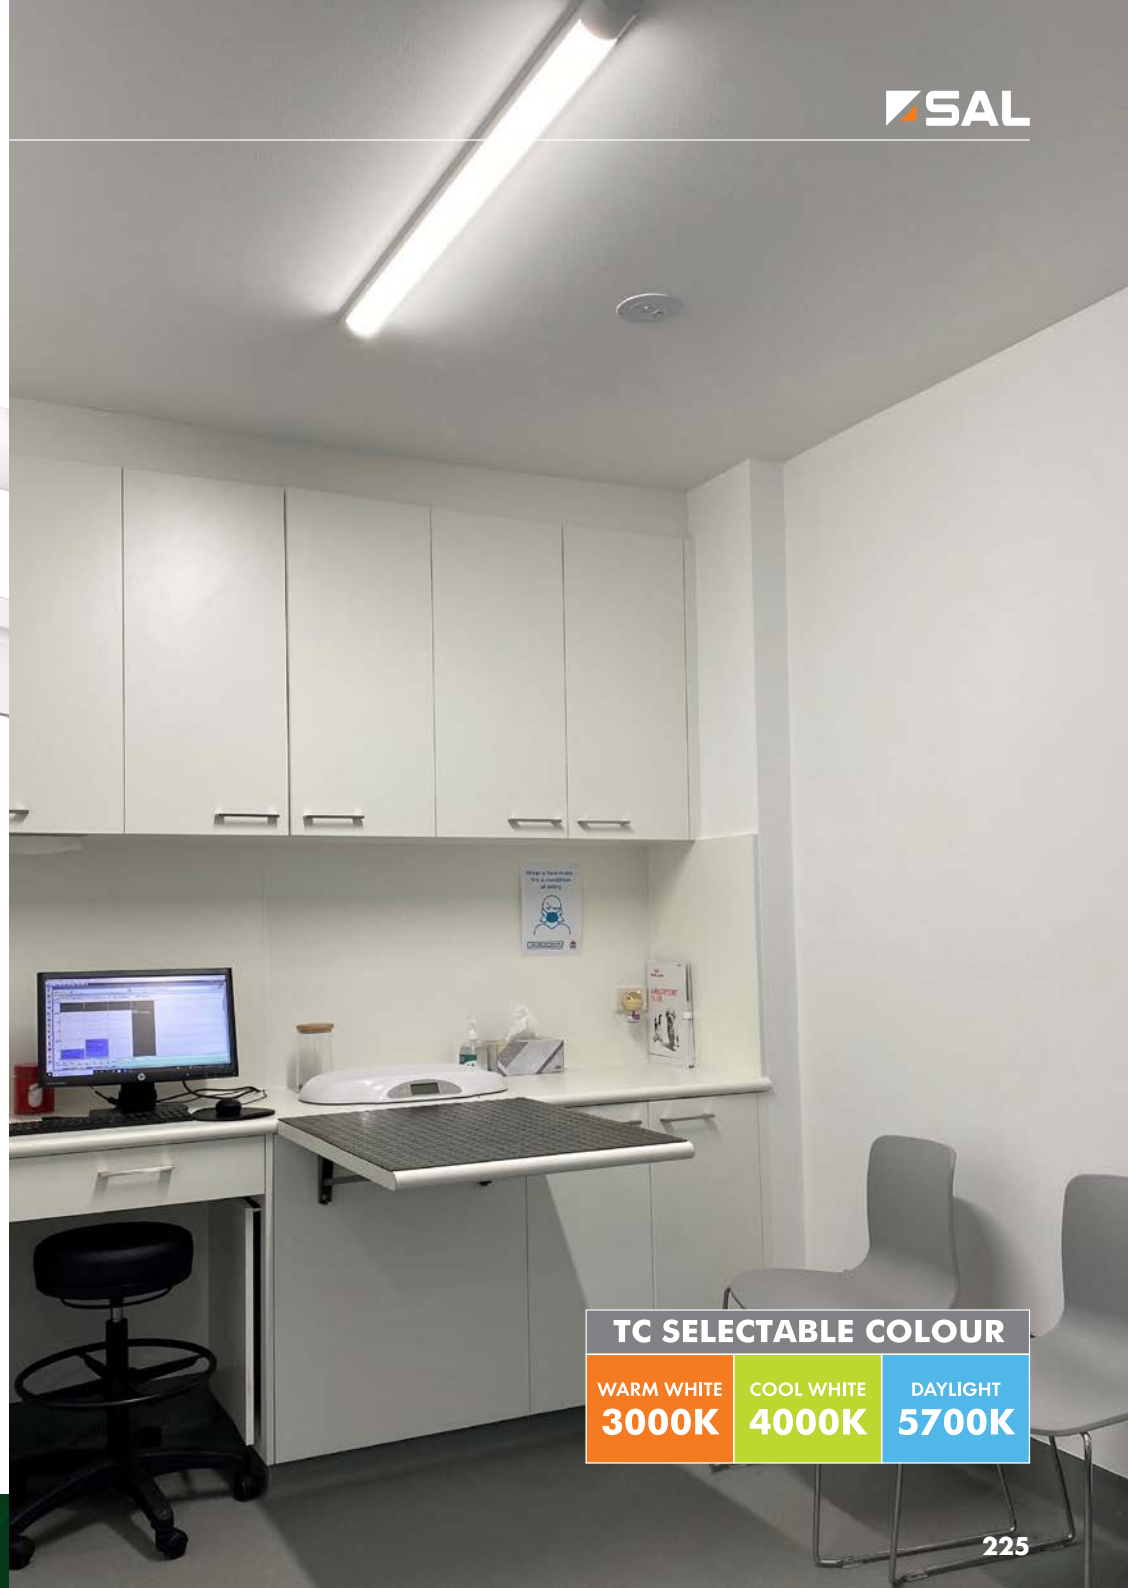

TC SELECTABLE COLOUR

WARM WHITE 3000K	COOL WHITE 4000K	DAYLIGHT 5700K
----------------------------	----------------------------	--------------------------

BLADE SL9709 TC - 25W/50W

LED low profile batten with selectable CCT

Application

Conventional LED profile battens for commercial service spaces

Design Specifications

- Selectable CCT 3000K/4000K/5700K
- Extruded aluminium body profile with a rear cable channel for easy wiring access
- White powder coat finish
- Integral constant current non-dimmable LED driver, 25 or 45 or 50 watt
- Robust opal polycarbonate diffuser
- High efficiency LED optics, CRI >80, 120° beam distribution

Performance

- Non-dimmable




Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimension L x W x H (mm)
SL9709/60TC	240/50	25	3400/3600/3600	3000/4000/5700	120°	White	613 x 120 x 35
SL9709/120TC	240/50	45	6100/6500/6500	3000/4000/5700	120°	White	1213 x 120 x 35
SL9709/150TC	240/50	50	6900/7300/7300	3000/4000/5700	120°	White	1485 x 120 x 35



Photometric Data

Unit: cd C0/C180 — C90/C270

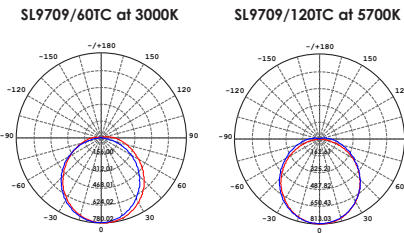

TC SELECTABLE COLOUR

WARM WHITE 3000K COOL WHITE 4000K DAYLIGHT 5700K



TC SELECTABLE COLOUR
DUAL POWER



ECOLINE III SL9732 TC - 10W/50W

LED narrow diffused batten with selectable CCT and Dual Power

Application

Conventional linear LED batten products for commercial service spaces

Design Specifications

- 65 mm narrow steel body
- White powder coat finish with a robust polycarbonate diffuser
- Large terminal block, easy installation
- Selectable CCT 3000K/4000K/5700K
- High efficiency LED optics, CRI >80, 120° beam distribution
- Integral LED driver with selectable power
- Emergency options available
- Non-dimmable corridorSTANDBY options available




Performance

- Dimmable - Optional, refer model no.
- Dimmer Type, Trailing edge, optional 1-10V, DALI / DS1
- Optional sensor ON/OFF, refer model No. (DP3S)
- Optional corridorSTANDBY sensor



Photometric Data

Unit: cd C0/C180 — C90/C270
SL9732/20TC/DP3 at 4000K SL9732/40TC/DP3 at 4000K

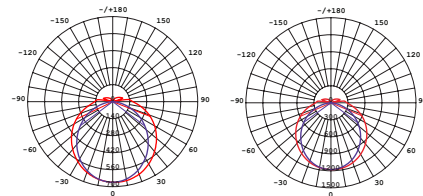

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Dimmable	CRI	Dimensions (L x W x H mm)
SL9732/20TC/DP3	240/50	10/20	1400/1490/1460 2370/2600/2460	3000/4000/5700	No	> 80	600 x 65 x 65
SL9732/20TC/DP3S	240/50	10/20	1400/1490/1460 2370/2600/2460	3000/4000/5700	No	> 80	600 x 65 x 65
SL9732/20TC3DIM	240/50	20	2400/2500/2450	3000/4000/5700	Yes	> 80	600 x 65 x 65
SL9732/40TC/DP3	240/50	20/40	2670/2800/2790 4600/5100/4860	3000/4000/5700	No	> 80	1135 x 65 x 65
SL9732/40TC/DP3S	240/50	20/40	2670/2800/2790 4600/5100/4860	3000/4000/5700	No	> 80	1135 x 65 x 65
SL9732/40TC3DIM	240/50	40	4650/4900/4700	3000/4000/5700	Yes	> 80	1135 x 65 x 65
SL9732/50TC/DP3	240/50	25/50	3280/3500/3460 6100/6700/6300	3000/4000/5700	No	> 80	1455 x 65 x 65

For terms of catalogue data use, refer to INDEX





Image courtesy of





TC SELECTABLE COLOUR
DUAL POWER

ECOLINE WIDE SL9738 TC/DP2 - 10W/40W

LED wide body diffused batten with selectable CCT and Dual Power

Application

Conventional linear LED batten products for residential or commercial service spaces

Design Specifications

- 110 mm wide steel body
- White powder coat finish with PC diffuser
- Large terminal block, easy installation
- Selectable CCT 3000K/4000K/5700K
- High efficiency LED optics, CRI >80, 120° beam distribution
- Integral constant current non-dimmable LED driver with selectable power
- Emergency options available
- Non-dimmable corridorSTANDBY options

Performance

- Dimmable - optional, trailing edge, 1-10V, DALI / DS1



Technical Specifications


Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimensions (L x W x H mm)
SL9738/20TC/DP2	240/50	10/20	1300/1400/1380 2200/2450/2350	3000/4000/5700	120°	White	610 x 110 x 65
SL9738/40TC/DP2	240/50	20/40	2600/2780/2750 4600/5200/4900	3000/4000/5700	120°	White	1225 x 110 x 65



Photometric Data

Unit: cd C0/C180 — C90/C270

SL9738/20TC/DP2 at 4000K SL9738/40TC/DP2 at 4000K

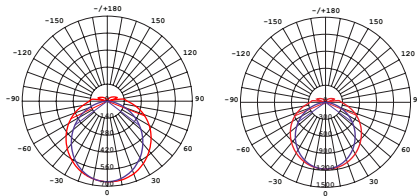

TC SELECTABLE COLOUR
DUAL POWER

ECOLINE XV SL9731 TC/DP - 10W/40W

LED narrow diffused batten with selectable CCT and Dual Power

Application

Conventional linear LED batten products for residential or commercial service spaces

Design Specifications

- 67 mm wide steel body
- White powder coat finish with a robust polycarbonate diffuser
- Large terminal block, easy installation
- Selectable CCT 3000K/4000K/5700K
- High efficiency LED optics, CRI >80, 120° beam distribution
- Integral constant current non-dimmable LED driver with selectable power
- Emergency options available

Performance

- Non-dimmable



Technical Specifications


Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimensions (L x W x H mm)
SL9731/20TC/DP	240/50	10/20	1100/1300/1200 2200/2500/2300	3000/4000/5700	120°	White	600 x 67 x 68
SL9731/40TC/DP	240/50	20/40	2300/2500/2400 4300/4900/4400	3000/4000/5700	120°	White	1200 x 67 x 68



Photometric Data

Unit: cd C0/C180 — C90/C270

SL9731/20TC/DP at 4000K SL9731/40TC/DP at 4000K

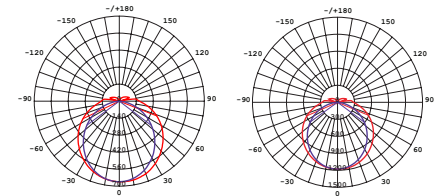

For terms of catalogue data use, refer to INDEX



LEDLINE SLD2000 - 20W SLD4000 - 40W

LED diffused batten 20 or 40 watt options

Application

Conventional LED linear surface mount battens for commercial service space

Design Specifications

- Pressed steel body profile
- White powder coat finish with an opal PMMA diffuser
- High efficiency LED optics, CRI >80, 4000K
- Integral constant current non-dimmable LED driver 20 or 40 watt
- Large terminal block, easy installation
- Unique diffuser design allows end to end installation
- Emergency options available
- Non-dimmable corridorSTANDBY options available

Performance

- Dimmable - Optional, Trailing edge, 1-10V, DALI / DSI




Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour	Dimensions (L x W x H mm)
SLD2000CW	240/50	20	1900	4000	> 80	120°	Optional	White	600 x 100 x 77
SLD2000CW/C	240/50	20	1900	4000	> 80	120°	No	White	600 x 100 x 77
SLD4000CW	240/50	40	3800	4000	> 80	120°	Optional	White	1120 x 100 x 77
SLD4000CW/C	240/50	40	3800	4000	> 80	120°	No	White	1120 x 100 x 77



Photometric Data SLD2000CW at 4000K

Unit: cd C0/C180 — C90/C270



PHOENIX II SL9775TC - 30W

30 watt LED linkable with selectable CCT

Application

Decorative commercial service spaces, meeting rooms, amenity areas

Design Specifications

- Extruded rectangular aluminium profile with an opal polycarbonate diffuser
- Choice of white or black finish
- High efficiency LED optics, CRI > 80
- Selectable CCT 3000/4000/5700K
- Integral 1-10V dimmable LED driver
- Surface mount or suspended
- Suspension kit (2 off 1800mm drops) incl.
- Optional surface mount, accessories to order (SL9775TC/CLIP - pack of two)
- Max connected units 15 off, optional straight joiner required (SL9775TC/LINK - pack of one)
- Continuous 5m diffuser roll (SL9775TC/DF5)

Performance

- Dimmable 1-10V




Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (L x W x H mm)
SL9775TC/WH	240/50	30	3100/3300/3300	3000/4000/5700	> 80	105°	White	1129 x 35 x 50
SL9775TC/BK	240/50	30	3100/3300/3300	3000/4000/5700	> 80	105°	Black	1129 x 35 x 50



Photometric Data SL9775TC at 4000K

Unit: cd C0/C180 — C90/C270



For terms of catalogue data use, refer to INDEX

SLIMLINE SEAMLESS TC LINKABLE SL9706 TC - 4W/22W

Selectable CCT, linkable slimline LED

Application

Great for commercial shop spaces, home pantries, walk-in wardrobes

Design Specifications

- Selectable CCT 3000K / 4000K / 5700K, beam distribution 120°, CRI >80
- Polycarbonate body profile and opal diffuser
- Integral constant current non-dimmable driver
- Individual switch control, plug and play flex and plug included
- Accessories: SL9706/32CM LINK (L 320mm)
SL9706/76CM LINK (L 760 mm)
- Double insulated

Performance

- Non-dimmable



Maximum connections

Mixed connections maximum 240W

Model	1	2	3	4...	Total
SL9706/280TC	1	1	1	1	55pcs
SL9706/540TC	1	1	1	1	25pcs
SL9706/840TC	1	1	1	1	17pcs
SL9706/1140TC	1	1	1	1	12pcs
SL9706/1440TC	1	1	1	1	10pcs

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
SL9706/280TC	240/50	4	350/400/350	3000/4000/5700	> 80	120°	No	White
SL9706/540TC	240/50	9	850/1050/900	3000/4000/5700	> 80	120°	No	White
SL9706/840TC	240/50	13	1300/1500/1400	3000/4000/5700	> 80	120°	No	White
SL9706/1140TC	240/50	18	1800/2100/1850	3000/4000/5700	> 80	120°	No	White
SL9706/1440TC	240/50	22	2150/2450/2200	3000/4000/5700	> 80	120°	No	White

Dimensions

Model	Length (L)	Height (H)	Width (W)
SL9706/280	280 mm	36 mm	23 mm
SL9706/540	540 mm	36 mm	23 mm
SL9706/840	840 mm	36 mm	23 mm
SL9706/1140	1140 mm	36 mm	23 mm
SL9706/1440	1440 mm	36 mm	23 mm



For terms of catalogue data use, refer to INDEX



Ecoline II image courtesy of



TUBELINE STD25 TC - 9W/36W

Conventional LED tube diffused
battens 9 - 36 watt, with selectable CCT

Application

Conventional linear LED batten profile ideal
for residential and commercial spaces

Design Specifications

- Durable metal body profile, white powder coat finish
- High efficiency LED T8 tubes included with selectable CCT, CRI >80
- Large terminal block, easy installation
- Integral safety HRC fuse
- High performance PMMA prismatic diffuser, beam distribution 120°
- Emergency options available


Performance

- Non-dimmable



Photometric Data STD25/212TC at 4000K

Unit: cd C0/C180 — C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimensions (L x W x H mm)
STD25/106TC	240/50	9	900/1100/1000	3000/4000/6000	120°	White	620 x 69 x 83
STD25/112TC	240/50	18	1800/2200/2000	3000/4000/6000	120°	White	1230 x 69 x 83
STD25/206TC	240/50	2 x 9	2 x 900/1100/1000	3000/4000/6000	120°	White	620 x 109 x 83
STD25/212TC	240/50	2 x 18	2 x 1800/2200/2000	3000/4000/6000	120°	White	1230 x 109 x 83

For terms of catalogue data use, refer to INDEX





TC SELECTABLE COLOUR

TITAN S9776 TC - 40W/80W

40 or 80 watt LED connectable profile

Application

Decorative commercial applications, meeting rooms or amenity areas

Design Specifications

- Extruded aluminium profile colour white or black, with opal polycarbonate diffuser
- High efficiency LED optics, CRI >80, beam distribution 90°
- Selectable CCT 3000K/4000K/5700K
- Integral constant current non-dimmable LED driver 40 or 80 watt
- Adjustable suspension kit included (2 x S5Y1512),
- Accessory option - straight link (S9776IP)
- Surface mounted (allow min. 200 mm clearance at both ends)
- Loop in loop out cable duct


Performance

- Dimmable - Optional
- Dimmer Type, Trailing edge, DALI / DSI



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Dimmable	Fitting Colour	Dimensions (L x W x H mm)
S9776/40TC	240/50	40	3900/4050/3950	3000/4000/5700	Optional	White	1136 x 71 x 99
S9776/40TC/BK	240/50	40	3900/4050/3950	3000/4000/5700	Optional	Black	1136 x 71 x 99
S9776/80TC	240/50	80	7800/8100/7900	3000/4000/5700	Optional	White	2256 x 71 x 99
S9776/80TC/BK	240/50	80	7800/8100/7900	3000/4000/5700	Optional	Black	2256 x 71 x 99

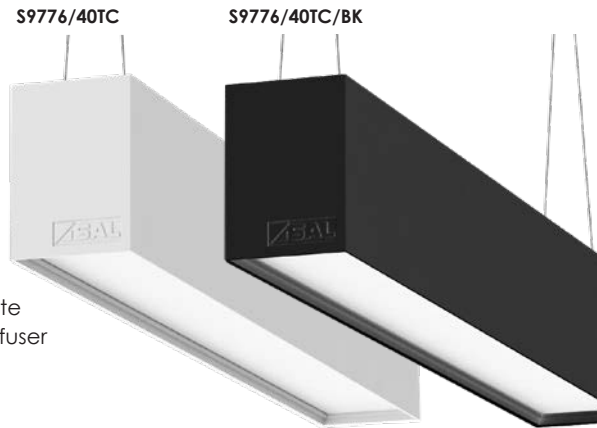

Photometric Data S9776/40TC at 4000K

Unit: cd C0/C180 — C90/C270




Image courtesy of R & H Electrical



SMARTER LIGHTING CHOICES



BENTO S9691 SQUARE PROFILE IP24 LED DOWNLIGHT. PRODUCT INFO GUIDE	BLADE LED BATTEN SL9707TC LOW PROFILE WIDE BODY 35W PRODUCT INFO GUIDE	BLADE LED BATTEN SL9709TC LOW PROFILE WIDE BODY 50W PRODUCT INFO GUIDE	BRIGHTSTAR ECO SE7199 LED FLOODLIGHTS PRODUCT INFO GUIDE	THE VERSATILE CANOPY LED SHP205 PRODUCT INFO GUIDE
COOPER III PRODUCT INFO GUIDE	COOLUM PLUS S9167TC. PRODUCT INFO GUIDE	COOPER II PRODUCT INFO GUIDE	ECOLINE XV SL9731TC/DP PRODUCT INFO GUIDE	ECOLINE SL9738 LED WIDE DIFFUSED BATTEN PRODUCT INFO GUIDE
EMERGENCY EXIT SELK1500EX2 PRODUCT INFO GUIDE	THE NEW QUICK CONNECT ESS107 PRODUCT INFO GUIDE	STREAMLINE LOW PROFILE FRISSE SL2104TC PRODUCT INFO GUIDE	THE NEW GIBALTAR SL9722TC LED VANDALPROOF BATTEN PRODUCT INFO GUIDE	REMARK D LED DOWNLIGHTS PRODUCT INFO GUIDE
COOLUM PLUS S9168TC. PRODUCT INFO GUIDE	SLIMLINE SEAMLESS TC LINKABLE SL9706 PRODUCT INFO GUIDE	PIXIE AMBIENCE SMART SOCKET PRODUCT INFO GUIDE	STARPAD II SE7071 TC FLOODLIGHT PRODUCT INFO GUIDE	THE NEW UFO SHB25MP150TC LED HIGHBAY PRODUCT INFO GUIDE
WAVE SE S9063TC LED DOWNLIGHT PRODUCT INFO GUIDE	WIDELINE SL9733TC/DP PRODUCT INFO GUIDE	BISMARCK II S9794 LED PANEL PRODUCT INFO GUIDE	UFO SHB23SE HIGH BAY PRODUCT INFO GUIDE	COOLUM PLUS S9069TC. PRODUCT INFO GUIDE
ALTONA SQUARE OR ROUND LED WALL LUMINAIRES. PRODUCT INFO GUIDE	BRIGHT STAR LED FLOODLIGHT SE7199 PRODUCT INFO GUIDE	BUNKER 15 TC ROUND PRODUCT INFO GUIDE	BUNKER 15 TC OVAL PRODUCT INFO GUIDE	

Scan me

SAL YouTube PRODUCT GUIDES, MORE INFORMATION, EASY TO FIND



TC SELECTABLE COLOUR

WIDELINE SL9733 TC/DP - 9W/55W

LED wide diffused batten 9 - 55 watt with selectable CCT

Application

Low profile design suitable for residential apartments and commercial service spaces

Design Specifications

- Wide pressed steel base with opal polycarbonate diffuser
- Quality white powder coated finish
- High efficiency LED optics, CRI >80, beam distribution 120°
- Integral constant current non-dimmable LED driver
- Selectable CCT 3000K/4000K/5700K
- Large terminal block, for easy installation




160mm WIDE

Photometric Data

Unit: cd C0/C180 — C30/C210
C60/C240 — C90/C270

SL9733/206TC/DP at 4000K SL9733/212TC/DP at 4000K

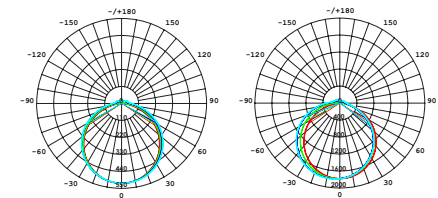

Performance

- Non-dimmable



Technical Specifications


Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (L x W x H mm)
SL9733/206TC/DP	240/50	9 18	1200/1250/1230 2100/2300/2200	3000/4000/5700	> 80	120°	White	610 x 160 x 63
SL9733/212TC/DP	240/50	18 36	2300/2400/2350 3800/4150/3900	3000/4000/5700	> 80	120°	White	1145 x 160 x 63
SL9733/215TC/DP	240/50	28 55	3550/3700/3650 5900/6350/6100	3000/4000/5700	> 80	120°	White	1495 x 160 x 63

For terms of catalogue data use, refer to INDEX



sal.net.au



 SAL National Pty Ltd - 40 Biloela St, Villawood NSW 2163

 + 61 2 9723 3099

 www.sal.net.au

 info@sal.net.au

 VICT/TAS - 46/48 Keys Road Moorabbin VIC 3189

 + 61 3 9532 3168

 info@sal.net.au

 QLD - 36 Whitelaw Place Richlands QLD 4077

 + 61 7 3879 5999

 info@sal.net.au

 SA/NT - Unit 1, 9 Alfred Avenue Beverley SA 5009

 +61 8 7084 1958

 info@sal.net.au

 WA - 29 Beringarra Avenue Malaga WA 6090

 +61 8 9248 7458

 info@sal.net.au



2024/25

