



SINCE 1998



2024/25

**SMARTER
LIGHTING
CHOICES**



A stylish range of traditional LED Oysters, incorporating a wide selection of colours and control options.





BENNY SL2106TC - 10W/24W

IP65, LED Oyster with selectable CCT.

Application

A perfect choice for apartments, residential or commercial spaces

Design Specifications

- Three models to select Ø220, 280 or 350mm
- UV resistant opal polycarbonate diffuser
- Rugged IK08 construction, colour white
- High efficiency LED optics, CRI > 80
- Integral microwave sensor and corridorSTANDBY sensor models available
- Double insulated, ceiling or wall mount.

Performance

- Non-dimmable



SL2106/20TC




SL2106/30TC



SL2106/40TC

Photometric Data

Unit: cd C0/C180 — C90/C270

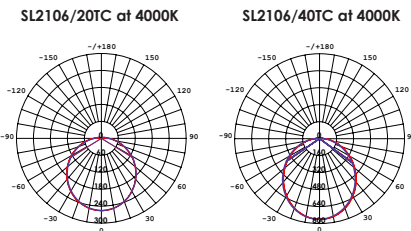

Technical Specifications

Integrated microwave motion sensor settings are **PRE-SET** and adjustable only by a qualified installer.

Model No.	Power (W)	Detection Range	Daylight Threshold	Duration (mins.)
SL2106/30TC/S	20	100%	Disabled	10
SL2106/30TC/S1	20	100%	50 Lux	10
SL2106/30TC/S2	20	50%	50 Lux	5



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour	Dimensions (D x H mm)
SL2106/20TC	240/50	10	800	3000/4000/6000	> 80	White	Ø 220 x 65
SL2106/30TC	240/50	20	1600	3000/4000/6000	> 80	White	Ø 280 x 71
SL2106/30TC/S	240/50	20	1600	3000/4000/6000	> 80	White	Ø 280 x 71
SL2106/40TC	240/50	24	2000	3000/4000/6000	> 80	White	Ø 350 x 81
SL2106/40TC/C	240/50	24	2000	3000/4000/6000	> 80	White	Ø 350 x 81

Integrated microwave motion sensor with corridorSTANDBY function

Model No.	Power (W)	Detection Range	Daylight Threshold	Duration (mins.)	Standby Level	Standby Period
SL2106/40TC/C	24	100%	Disabled	12	20%	30 mins.
SL2106/40TC/C1	24	100%	50 Lux	6	30%	30 mins.
SL2106/40TC/C2	24	100%	50 Lux	6	20%	24 hrs.



For interior products, the IP rating stated is from below the ceiling

For terms of catalogue data use, refer to INDEX





CUSHION SL3247 -12W/30W

Dimmable, square profile LED surface mount, IP54

Application

A perfect choice for apartments or commercial spaces

Design Specifications

- Four models to select 12, 18, 25 or 30 watt
- Soft square architectural design, colour white with an opal polycarbonate diffuser
- High efficiency LED optics, CRI >80, CCT 4000K, optional 3000K/5700K
- Integral constant current trailing edge dimmable LED driver
- Low profile design, IP54
- Double insulated, ceiling or wall mount.

Performance

- Dimmable, trailing edge
- Optional (non-dimmable) integral microwave sensor, (SL3247/25CW)




Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour	Dimensions (L x W x H mm)
SL3247/25CW	240/50	12	1000	4000	> 80	White	250 x 250 x 50
SL3247/30CW	240/50	18	1600	4000	> 80	White	300 x 300 x 40
SL3247/35CW	240/50	25	2400	4000	> 80	White	350 x 350 x 40
SL3247/40WW	240/50	30	2500	3000	> 80	White	400 x 400 x 50
SL3247/40CW	240/50	30	2500	4000	> 80	White	400 x 400 x 50



Photometric Data

Unit: cd C0/C180 — C90/C270

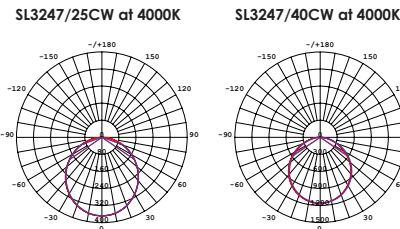

TC SELECTABLE COLOUR

DECORD SL2112/30TC - 24W

Dimmable LED Oyster 24 watt with selectable CCT, IP44

Application

A perfect choice for the home or commercial spaces

Design Specifications

- Selectable CCT
- Durable PC base and powder coated aluminium trim, with white, black or optional gold PC trim insert. (SL2112/30RING/GD)
- High performance opal PC diffuser
- High efficiency LED optics, CRI >80
- Integral dimmable LED driver
- Double insulated, ceiling or wall mount and optional suspension kits available, (SL2112SPK/BK, SL2112SPK/WH)

Performance

- Dimmable, trailing edge




Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour	Dimensions (D x H mm)
SL2112/30TC/WH	240/50	24	2000/2400/2300	3000/4000/5700	> 80	White	∅ 301 x 58
SL2112/30TC/BK	240/50	24	2000/2400/2300	3000/4000/5700	> 80	Black	∅ 301 x 58



Photometric Data SL2112/30TC at 4000K

Unit: cd C0/C180 — C90/C270



For interior products, the IP rating stated is from below the ceiling

For terms of catalogue data use, refer to INDEX



sal.net.au

249



TC SELECTABLE COLOUR

DECORD SL2112/40TC - 30W

Dimmable LED Oyster 30 watt with selectable CCT , IP44

Application

A perfect choice for the home or commercial spaces


Design Specifications

- Selectable CCT
- Durable PC base and powder coated aluminium trim, with white, black or optional gold PC trim insert. (SL2112/40RING/GD)
- High performance opal PC diffuser
- High efficiency LED optics, CRI >80
- Integral dimmable LED driver
- Double insulated, ceiling or wall mount and optional suspension kits available, (SL2112SPK/BK, SL2112SPK/WH)



Photometric Data SL2112/40TC at 4000K

Unit: cd C0/C180 — C90/C270



Performance

- Dimmable, trailing edge



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour	Dimensions (D x H mm)
SL2112/40TC/WH	240/50	30	2800/3300/3200	3000/4000/5700	> 80	White	Ø 422 x 58
SL2112/40TC/BK	240/50	30	2800/3300/3200	3000/4000/5700	> 80	Black	Ø 422 x 58

For interior products, the IP rating stated is from below the ceiling



TC SELECTABLE COLOUR

DUAL POWER

DERBY SO3900 TC DPD - 13W/30W

Dimmable LED Oyster 13 to 30 watt with selectable CCT and dual power, IP44

Application

A perfect choice for apartments or commercial spaces

Design Specifications


- Selectable CCT
- Durable powder coated steel body profile
- High performance opal PMMA diffuser
- High efficiency LED optics, CRI >80
- Integral dimmable LED driver, with dual power selections
- Two versatile profile sizes 13/18 or 21/30 watt, ceiling mount



Photometric Data

Unit: cd C0/C180 — C90/C270

SO3900/30TC/DPD at 4000K SO3900/40TC/DPD at 4000K

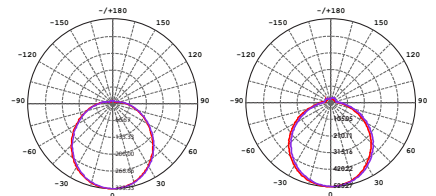

Performance

- Dimmable, trailing edge




Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (D x H mm)
SO3900/30TC/DPD	240/50	13 18	1200/1350/1300 1600/1750/1650	3000/4000/5700	> 80	120°	White	Ø 307 x 71
SO3900/40TC/DPD	240/50	21 30	1550/1850/1700 2250/2700/2500	3000/4000/5700	> 80	120°	White	Ø 397 x 83

For terms of catalogue data use, refer to INDEX



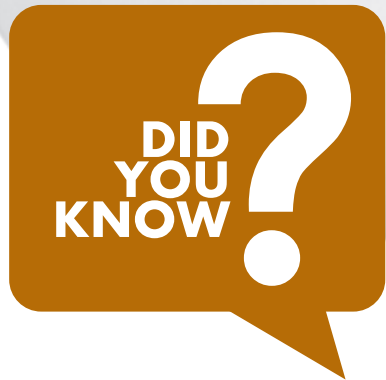

TC SELECTABLE COLOUR

WARM WHITE 3000K	COOL WHITE 4000K	DAYLIGHT 5700K
----------------------------	----------------------------	--------------------------

Not sure about what colour temperature you need for an installation? Consider selecting the TC (tri-colour) range from SAL, which allows the installer to simply select the CCT between 3000K, 4000K or 5700K via the integral DIP switch. Easy to use, less stock to manage and allows the installer to create the perfect room ambience.



DISC SL2105 TC - 12W/30W

Dimmable, IP54 LED Oyster, 12, 25, 30 watt, with selectable CCT, IP54

Application

A perfect choice for apartments, residential or commercial spaces

Design Specifications

- Robust white polycarbonate body profile, three sizes to select
- Quality opal polycarbonate diffuser
- High efficiency LED optics, CRI >80, selectable CCT 3000K/4000K/5700K
- Integral trailing edge dimmable LED driver
- Low profile design, IP54
- Double insulated, ceiling mount


Performance

- Dimmable, trailing edge



Photometric Data

Unit: cd C0/C180 — C90/C270

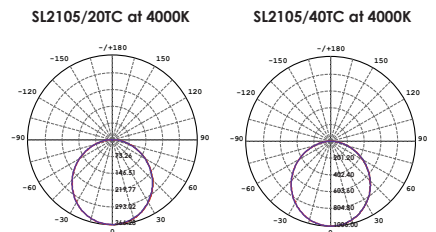

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour	Dimensions (D x H mm)
SL2105/20TC	240/50	12	1100/1200/1200	3000/4000/5700	> 80	White	Ø 200 x 48
SL2105/30TC	240/50	25	2450/2600/2500	3000/4000/5700	> 80	White	Ø 300 x 40
SL2105/40TC	240/50	30	2800/3480/3000	3000/4000/5700	> 80	White	Ø 400 x 52

For terms of catalogue data use, refer to INDEX





TC SELECTABLE COLOUR
DUAL POWER

FRISBEE® SL2104TC - 8W/25W

Low profile, recessed or surface mount oyster with selectable CCT and dual power, IP44.

Application

A creative design for residential or commercial spaces


Design Specifications

- Low profile design, ceiling mount
- Durable white polyamide body profile with an opal polycarbonate diffuser
- High efficiency LED optics, with selectable CCT 3000K/4000K/6000K
- Integral non-dimmable driver with a choice of selectable power 8/12W, 12/18W, 18/25W
- Flexible cut-out sizes to suit retrofit recessed applications -
SL2104/18TC 80 - 100mm,
SL2104/22TC 120 - 200mm,
SL2104/30TC 150 - 270mm
- Double insulated




SL2104/18TC/DP

Dimensions



Photometric Data

Unit: cd C0/C180 — C90/C270

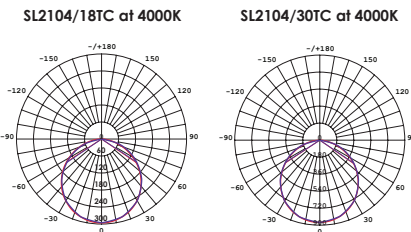


For interior products, the IP rating stated is from below the ceiling




TC SELECTABLE COLOUR
DUAL POWER



SL2104/22TC/DP



SL2104/30TC/DP



Performance

- Non-dimmable



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (D x H mm)
SL2104/18TC/DP	240/50	8/12	520/560/560 780/840/840	3000/4000/6000	> 80	110°	White	Ø 180 x 21
SL2104/22TC/DP	240/50	12/18	840/900/900 1260/1350/1350	3000/4000/6000	> 80	110°	White	Ø 220 x 21
SL2104/30TC/DP	240/50	18/25	1350/1440/1440 1875/2000/2000	3000/4000/6000	> 80	110°	White	Ø 300 x 25

For terms of catalogue data use, refer to INDEX





TC SELECTABLE COLOUR
DUAL POWER

GEM SO3701 TC/DP2 - 8W/30W

LED Oyster 8 to 30 watt, satin nickel trim with selectable CCT and dual power

Application

A perfect choice for apartments, residential or commercial spaces

Design Specifications

- Selectable CCT 3000K/4000K/6000K
- White powder coated steel body profile
- High performance opal PMMA diffuser
- High efficiency LED optics, CRI >80
- Satin Nickel plated deco trim
- Integral non-dimmable LED driver with dual power selection
- Ceiling mount, two versatile profile sizes
Ø 320 or 400mm

Performance

- Non-dimmable



Technical Specifications


Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (D x H mm)
SO3701/30TC/DP2	240/50	8 16	650/700/665 1050/1300/1115	3000/4000/6000	> 80	120°	Satin Nickel	Ø 320 x 85
SO3701/40TC/DP2	240/50	15 30	1300/1400/1350 2150/2600/2200	3000/4000/6000	> 80	120°	Satin Nickel	Ø 400 x 90



Photometric Data

Unit: cd C0/C180 — C90/C270

SO3701/30TC/DP2 at 4000K SO3701/40TC/DP2 at 4000K

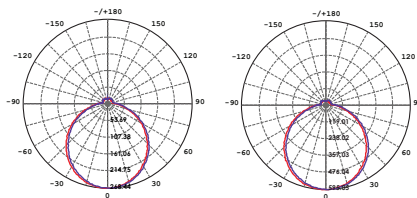

TC SELECTABLE COLOUR
DUAL POWER

GEM - DIMMABLE SO3701 TC/DPD - 8W/30W

Dimmable LED Oyster 8 to 30 watt, satin nickel trim with selectable CCT and dual power

Application

A perfect choice for apartments, residential or commercial spaces

Design Specifications

- Selectable CCT 3000K / 4000K / 6000K
- White powder coated steel body profile
- High performance opal PMMA diffuser
- High efficiency LED optics, CRI >80
- Satin Nickel plated deco trim
- Integral dimmable LED driver with dual power selection
- Ceiling mount, two versatile profile sizes
Ø 320 or 400mm

Performance

- Dimmable - trailing edge



Technical Specifications


Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (D x H mm)
SO3701/30TC/DPD	240/50	8 16	650/700/665 1050/1300/1115	3000/4000/6000	> 80	120°	Satin Nickel	Ø 320 x 85
SO3701/40TC/DPD	240/50	15 30	1300/1400/1350 2150/2600/2200	3000/4000/6000	> 80	120°	Satin Nickel	Ø 400 x 90



Photometric Data

Unit: cd C0/C180 — C90/C270

SO3701/30TC/DPD at 4000K SO3701/40TC/DPD at 4000K

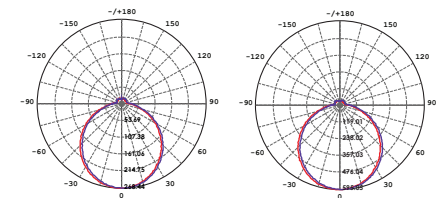

For interior products, the IP rating stated is from below the ceiling

For terms of catalogue data use, refer to INDEX



sal.net.au

257



TC SELECTABLE COLOUR

KINGSTON - DIMMABLE SL2115 TCD - 13W/30W

Dimmable, super low profile LED Oyster
13, 24 or 30 watt, with selectable CCT, IP54

Application

A perfect choice for apartments,
residential or commercial spaces

Design Specifications

- Selectable CCT 3000K / 4000K / 5700K
- High performance IP54 opal mounting base and LED optical module
- High efficiency LED optics, 100° beam distribution, CRI >80
- Integral dimmable LED driver
- Double insulated, ceiling mount




Performance

- Dimmable - trailing edge



Photometric Data

Unit: cd C0/C180 — C90/C270

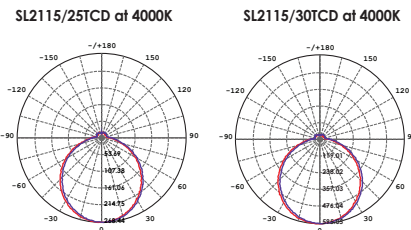

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (D x H mm)
SL2115/25TCD	240/50	13	1000/1150/1050	3000/4000/5700	> 80	100°	White	∅ 244 x 30
SL2115/30TCD	240/50	24	1900/2100/2000	3000/4000/5700	> 80	100°	White	∅ 290 x 30
SL2115/40TCD	240/50	30	2600/2800/2700	3000/4000/5700	> 80	100°	White	∅ 420 x 30

For interior products, the IP rating stated is from below the ceiling



Scan me

**SAL YouTube
PRODUCT GUIDES,
MORE INFORMATION,
EASY TO FIND**





TC SELECTABLE COLOUR
DUAL POWER

OPAL SO3700 TC/DP2 - 8W/30W

LED Oyster 8 to 30 watt, with selectable CCT and dual power, IP20

Application

A perfect choice for apartments or commercial spaces

Design Specifications

- Selectable CCT 3000K/4000K/6000K
- Durable powder coated steel body profile
- High performance opal PMMA diffuser
- High efficiency SMD optics, CRI >80
- Integral, non-dimmable LED driver with dual power selections
- Ceiling mount, two versatile profile sizes
Ø 320 or 400mm

Performance


- Dimmable - Optional, DALI
- Sensor options, Microwave



Photometric Data

Unit: cd C0/C180 — C90/C270

SO3700/30TC/DP2 at 4000K SO3700/40TC/DP2 at 4000K

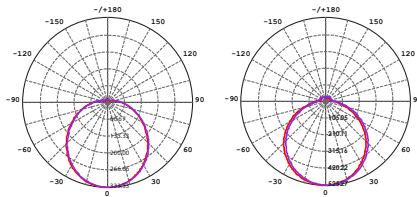

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (D x H mm)
SO3700/30TC/DP2	240/50	8/16	700/760/720 1100/1400/1200	3000/4000/6000	> 80	120°	White	Ø 310 x 78
SO3700/40TC/DP2	240/50	15/30	1400/1500/1450 2350/2800/2400	3000/4000/6000	> 80	120°	White	Ø 390 x 102

For interior products, the IP rating stated is from below the ceiling



TC SELECTABLE COLOUR
DUAL POWER

OPAL - DIMMABLE SO3700 TC/DPD - 8W/30W

Dimmable LED Oyster 8 to 30 watt, with selectable CCT and dual power, IP20

Application

A perfect choice for apartments or commercial spaces

Design Specifications

- Selectable CCT 3000K/4000K/6000K
- Durable powder coated steel body profile
- High performance opal PMMA diffuser
- High efficiency SMD optics, CRI >80
- Integral, dimmable LED driver with dual power selections
- Ceiling mount, two versatile profile size
Ø 320 or 400mm

Performance


- Dimmable, trailing edge



Photometric Data

Unit: cd C0/C180 — C90/C270

SO3700/30TC/DPD at 4000K SO3700/40TC/DPD at 4000K

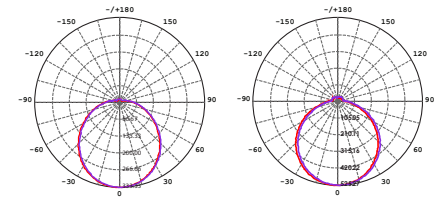


Technical Specifications


Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (D x H mm)
SO3700/30TC/DPD	240/50	8/16	700/760/720 1100/1400/1200	3000/4000/6000	> 80	120°	White	Ø 310 x 100
SO3700/40TC/DPD	240/50	15/30	1400/1500/1450 2350/2800/2400	3000/4000/6000	> 80	120°	White	Ø 390 x 112

For terms of catalogue data use, refer to INDEX





 SAL National Pty Ltd - 40 Biloela St, Villawood NSW 2163

 + 61 2 9723 3099

 www.sal.net.au

 info@sal.net.au

 VICT/TAS - 46/48 Keys Road Moorabbin VIC 3189

 + 61 3 9532 3168

 info@sal.net.au

 QLD - 36 Whitelaw Place Richlands QLD 4077

 + 61 7 3879 5999

 info@sal.net.au

 SA/NT - Unit 1, 9 Alfred Avenue Beverley SA 5009

 +61 8 7084 1958

 info@sal.net.au

 WA - 29 Beringarra Avenue Malaga WA 6090

 +61 8 9248 7458

 info@sal.net.au



2024/25

