




SINCE 1998



2024/25

**SMARTER
LIGHTING
CHOICES**



A stylish selection of decorative interior LED Track systems, ideal for retail environments.





SINGLE CIRCUIT UNIVERSAL TRACK & ACCESSORIES STR4800

Single circuit track, universal HALO type

Application


Designed for creative retail or residential applications

Design Specifications

- Extruded aluminium profile, with quality powder coat finish
- Length 1 m or 2 m
- Complete with end cap and live end
- Track components: Straight joiner, Live end, Live centre feed, L-shaped joiner, T-shaped joiner, Cross joiner, Track adaptor, Suspension kit
- Rating: TOTAL current capacity 10A per system




Dimensions

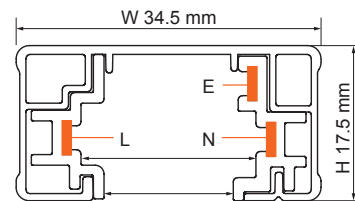

Track Components

Straight Joiner




Model No.	Colour
STR4801 WH	White
STR4801 BK	Black

Live End




Model No.	Colour
STR4802 WH	White
STR4802 BK	Black

Live Centre Feed




Model No.	Colour
STR4803 WH	White
STR4803 BK	Black

L-shaped Joiner




Model No.	Colour
STR4804 WH	White
STR4804 BK	Black

T-shaped Joiner



Model No.	Colour
STR4805 WH	White
STR4805 BK	Black

Cross Joiner



Model No.	Colour
STR4806 WH	White
STR4806 BK	Black

Track Adaptor



Model No.	Colour
STR4808 WH	White
STR4808 BK	Black

Maximum (mass) load limit per track adaptor is 2kg


Suspension Kit



Model No.	Colour
SSI1512	Stainless Steel



SINGLE CIRCUIT TRACK DIAGRAM

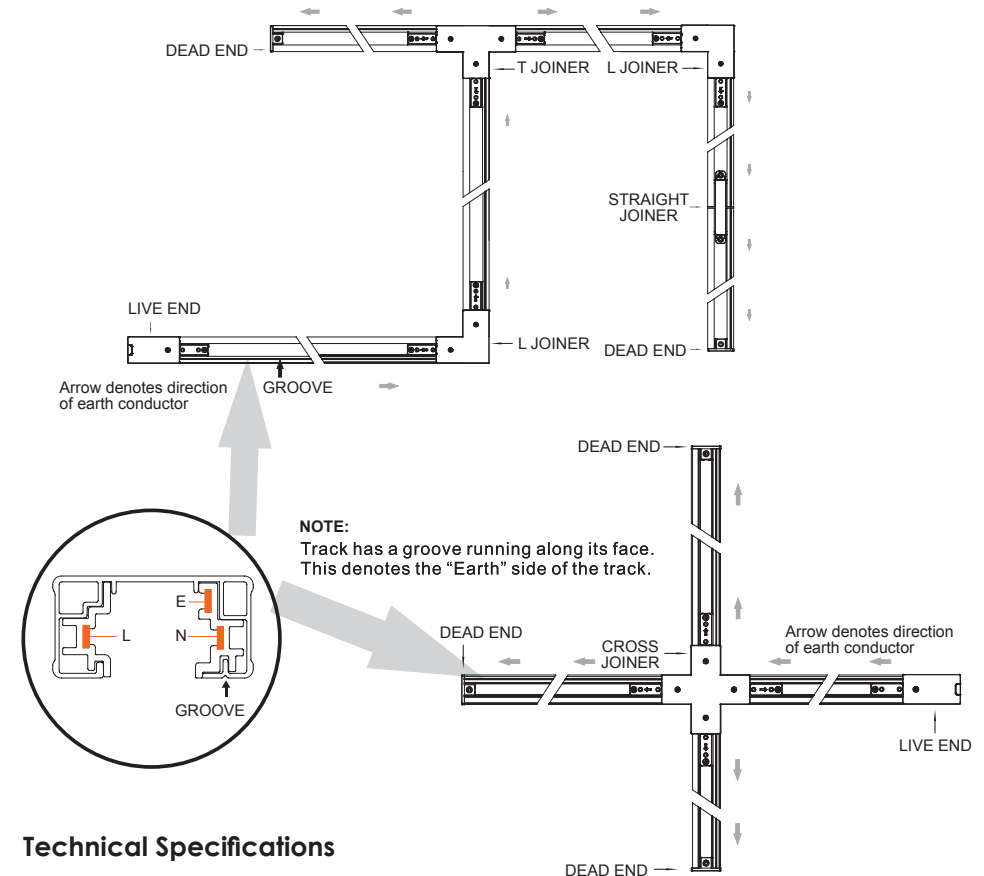

Technical Specifications

Model No.	Length	Colour
STR4800/1 WH	1 m	White
STR4800/1 BK	1 m	Black
STR4800/2 WH	2 m	White
STR4800/2 BK	2 m	Black





SPOCK STR4866 - 15W

15 watt single circuit, LED rotatable track light

Application

Designed for decorative residential and interior retail applications

Design Specifications

- Premium aluminium body profile, white or black finish
- Quality powder coated finish, high output LED optics, CRI >80
- Beam angle 24° standard, 45° optional, CCT choice 3000K or 4000K
- High performance multi-faceted reflector system, integral constant current non-dimmable LED driver


Performance

- Non-dimmable




Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
STR4866WW/WH	240/50	15	1600	3000	> 80	24°	No	White
STR4866WW/BK	240/50	15	1600	3000	> 80	24°	No	Black
STR4866CW/WH	240/50	15	1600	4000	> 80	24°	No	White
STR4866CW/BK	240/50	15	1600	4000	> 80	24°	No	Black

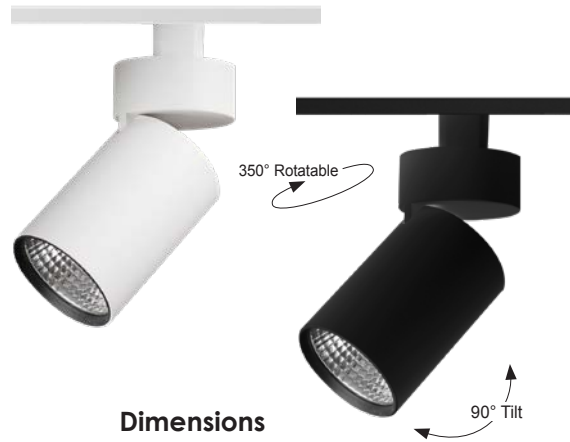


Dimensions



Photometric Data STR4866CW at 4000K

Unit: cd C0/C180 — C30/C210
cd C60/C240 — C90/C270



TC SELECTABLE COLOUR

SPOT II LED GU10 STR4863TC - 4W

4 watt LED GU10, architectural single circuit track spot

Application

Ideal for decorative retail and interior residential spaces

Design Specifications

- Aluminium body profile
- Powder coat finish in white or black
- GU10 lamp base
- Selectable CCT GU10 lamp included, 3000/4000/6000K CRI>80, beam distribution 50°
- 350° horizontal rotation, 120° vertical
- Lamp options: GU10L550TC, GU10LR750, GU10LA750 (trailing edge dimmable)

Performance

- Dimmable - Optional, Trailing edge dimmable lamp GU10LA750




Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
STR4863TC/WH	240/50	4	360/400/380	3000/4000/6000	> 80	50°	Optional	White
STR4863TC/BK	240/50	4	360/400/380	3000/4000/6000	> 80	50°	Optional	Black



Dimensions



For terms of catalogue data use, refer to INDEX





Image courtesy of





TC SELECTABLE COLOUR

UNITREK DIMMABLE STR9017TC - 10W

Single circuit, dimmable 10 watt architectural track spot, with integral driver

Application


Ideal for decorative retail or interior residential spaces

Design Specifications

- Durable Polyamide body profile, colour white or black
- High output LED optics, CRI >80, selectable CCT 3000K / 4000K / 5700K
- Polycarbonate lens, 40° beam distribution
- 10 watt integral trailing edge dimmable driver
- Optional black or white baffle available



Dimensions




Performance

- Dimmable - Trailing edge



Photometric Data STR9017/10TC at 3000K

Unit: cd C0/C180 — C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimension (Ø x H mm)
STR9017/10TC/WH	240/50	10	580/700/630	3000/4000/5700	> 80	40°	White	Ø 60 x 125
STR9017/10TC/BK	240/50	10	580/700/630	3000/4000/5700	> 80	40°	Black	Ø 60 x 125



TC SELECTABLE COLOUR

UNITREK DIMMABLE STR9017TC - 15W

Single circuit, dimmable 15 watt architectural track spot, with integral driver

Application


Ideal for decorative retail or interior residential spaces

Design Specifications

- Durable Polyamide body profile, colour white or black
- High output LED optics, CRI >80, selectable CCT 3000K / 4000K / 5700K
- Polycarbonate lens, 40° beam distribution
- 15 watt integral trailing edge dimmable driver
- Optional black or white baffle available



Dimensions




Performance

- Dimmable - Trailing edge



Photometric Data STR9017/15TC at 3000K

Unit: cd C0/C180 — C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimension (Ø x H mm)
STR9017/15TC/WH	240/50	15	1000/1150/1100	3000/4000/5700	> 80	40°	White	Ø 70 x 140
STR9017/15TC/BK	240/50	15	1000/1150/1100	3000/4000/5700	> 80	40°	Black	Ø 70 x 140





TC SELECTABLE COLOUR
DUAL POWER

UNITREK STR9017TC/DP - 21W/30W

Single circuit, 21/30 watt architectural track spot, with integral driver

Application

Ideal for decorative retail or interior residential spaces

Design Specifications

- Durable Polyamide body profile, colour white or black
- High output LED optics, CRI >80, selectable CCT 3000K / 4000K / 5700K
- Polycarbonate lens, 40° beam distribution
- 21/30 watt integral non-dimmable LED driver
- Optional black or white baffle available



Dimensions




Performance

- Non-dimmable



Photometric Data STR9017/30TC/DP at 3000K

Unit: cd C0/C180 — C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimension (Ø x H mm)
STR9017/30TC/DP/WH	240/50	21 30	1600/1900/1700 2100/2400/2200	3000/4000/5700	40°	White	Ø 90 x 210
STR9017/30TC/DP/BK	240/50	21 30	1600/1900/1700 2100/2400/2200	3000/4000/5700	40°	Black	Ø 90 x 210



Image courtesy of





THREE CIRCUIT TRACK STR4890

Universal track - three circuit

Application

Designed for creative retail or residential applications

Design Specifications

- Extruded aluminium profile
- Power coat finish in black or white
- Profile length choices 1m or 2m
- Complete with one end cap
- Rating: TOTAL current capacity 16A per system

Track Components

Mini Joiner



Model No.	Colour
STR4891 WH	White
STR4891 BK	Black

Live End



Model No.	Colour
STR4892 WH	White
STR4892 BK	Black

Straight Connector



Model No.	Colour
STR4893 WH	White
STR4893 BK	Black

L-shaped Connector



Model No.	Colour
STR4894 WH	White
STR4894 BK	Black

T-shaped Connector



Model No.	Colour
STR4895 WH	White
STR4895 BK	Black


Cross Shaped Connector



Model No.	Colour
STR4896 WH	White
STR4896 BK	Black



Dimensions



Adjustable Connector



Model No.	Colour
STR4897 WH	White
STR4897 BK	Black

Circuits Adaptor



Model No.	Colour
STR4898 WH	White
STR4898 BK	Black

T-bar Mounting Kit



Model No.	Colour
STR4899/1 WH	White
STR4899/1 BK	Black

Suspension Unit with Rod (M6 x 1000 mm threaded rod)



Model No.	Colour
STR4899/2 WH	White
STR4899/2 BK	Black

Suspension Unit with Wire (Ø1.5 mm x 1500 mm wire)




Model No.	Colour
STR4899/3 WH	White
STR4899/3 BK	Black



THREE CIRCUIT TRACK

Assembly note: The Track system is designed with a raised spline that runs along one side of the track and the track components all have an arrow on one side. To assemble, insert each component into the track so that the arrow is on the same side as the raised spline.

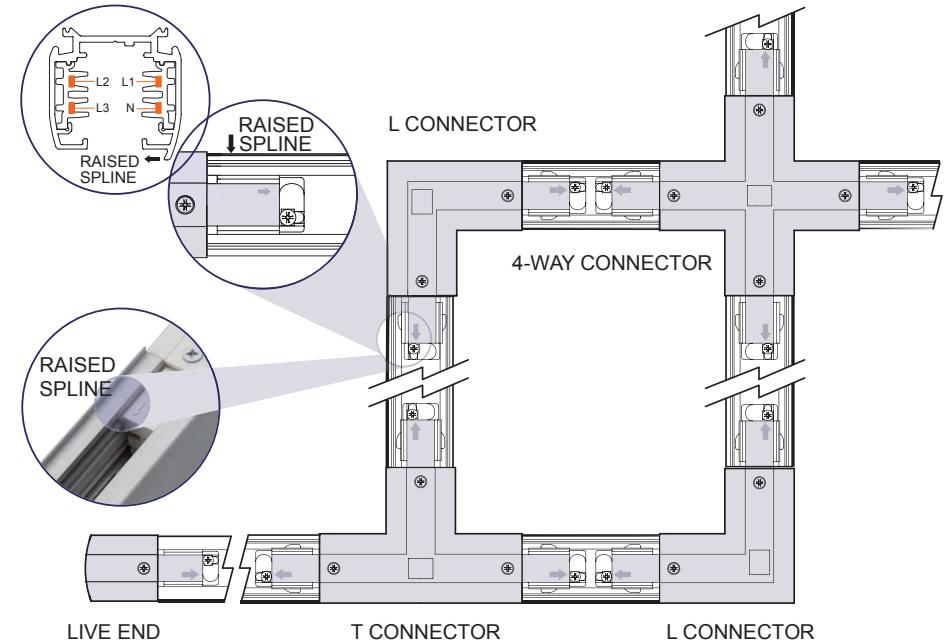

Technical Specifications

Model No.	Length	Colour
STR4890/1 WH	1 m	White
STR4890/1 BK	1 m	Black
STR4890/2 WH	2 m	White
STR4890/2 BK	2 m	Black





LED TRACK LIGHT STR4884 - 22W

Decorative three circuit rotatable
22 watt LED track light

Application

Designed for decorative,
retail and commercial applications

Design Specifications

- Extruded aluminium profile,
horizontal 350° rotation, 90° vertical
- White or black powder coated finish
- High output LED optics,
CRI >80, CCT 3000K, 4000K
- Beam angle 38° standard, 12° or 24° optional
- Integral constant current non-dimmable
22 watt LED driver

Performance

- Non-dimmable




Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
STR4884WW/WH	240/50	22	1900	3000	> 80	38°	No	White
STR4884WW/BK	240/50	22	1900	3000	> 80	38°	No	Black
STR4884CW/WH	240/50	22	1900	4000	> 80	38°	No	White
STR4884CW/BK	240/50	22	1900	4000	> 80	38°	No	Black




Dimensions

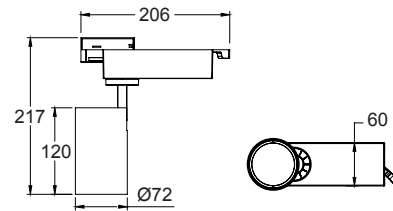

Photometric Data STR4884WW at 3000K

Unit: cd C0/C180 C30/C210
C60/C240 C90/C270



LED TRACK LIGHT STR4885 - 30W

Decorative three circuit rotatable
30 watt LED track light

Application

Designed for decorative,
retail and commercial applications

Design Specifications

- Extruded aluminium profile,
horizontal 350° rotation, 90° vertical
- White or black powder coated finish
- High output LED optics,
CRI >80, CCT 3000K, 4000K
- Beam angle 38° standard, 12° or 24° optional
- Integral constant current non-dimmable
30 watt LED driver

Performance

- Non-dimmable




Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
STR4885WW/WH	240/50	30	2600	3000	> 80	38°	No	White
STR4885WW/BK	240/50	30	2600	3000	> 80	38°	No	Black
STR4885CW/WH	240/50	30	2600	4000	> 80	38°	No	White
STR4885CW/BK	240/50	30	2600	4000	> 80	38°	No	Black




Dimensions

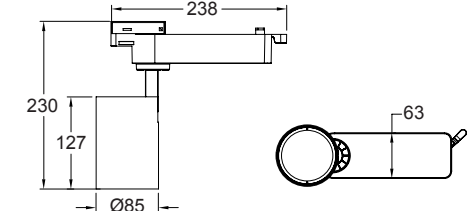

Photometric Data STR4885WW at 3000K

Unit: cd C0/C180 C30/C210
C60/C240 C90/C270



For terms of catalogue data use, refer to INDEX





TC SELECTABLE COLOUR
DUAL POWER

LED MULTI TRACK LIGHT STR4886MPTC - 30W/40W

Decorative three circuit, rotatable LED track light, with multi-focus adjustments, selectable CCT and power.

Application

Designed for decorative, retail and commercial applications

Design Specifications

- Extruded aluminium profile, horizontal 350° rotation, 90° vertical tilt
- White or black powder coated finish
- High output LED optics, CRI >90, CCT selectable 2700K/4000K/6000K
- Adjustable beam distribution, 24° - 60°
- Integral constant current non-dimmable, selectable power.


Performance

- Non-dimmable




Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour
STR4886MP30TC/WH	240/50	20	1600/1750/1750	2700/4000/6000	24° - 60° adjustable	White
STR4886MP30TC/BK		25	1850/2050/2050			Black
		30	2100/2300/2250			
STR4886MP40TC/WH	240/50	30	2500/2750/2700	2700/4000/6000	24° - 60° adjustable	White
STR4886MP40TC/BK		35	2800/3050/3000			Black
		40	3150/3400/3300			

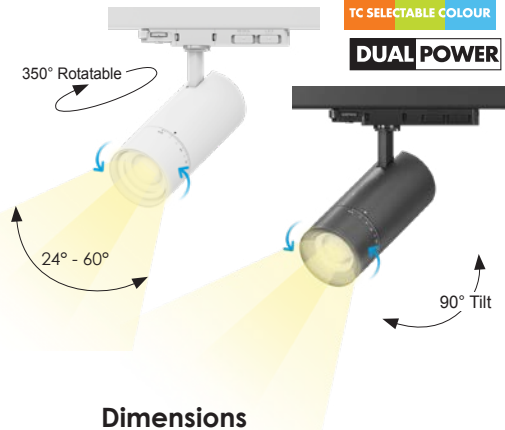


Dimensions



Photometric Data STR4886MP30TC at 3000K

Unit: cd C0/C180 — C30/C210 —
C60/C240 — C90/C270



TC SELECTABLE COLOUR

SPOT II STR3/4863TC - 4W

4 watt LED GU10, three circuit rotatable track light, with selectable CCT lamp

Application

Designed for decorative residential and retail applications

Design Specifications

- Aluminium profile, 350° horizontal rotation, 120° vertical tilt
- White or black powder coated finish
- GU10 lamp base
- Selectable CCT GU10 lamp included, 3000K/4000K/6000K, beam distribution 50°
- Lamp options GU10L550TC, GU10LR750, GU10LA750 (trailing edge dimmable)

Performance

- Dimmable - Optional, trailing edge dimmable lamp GU10LA750




Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
STR3/4863TC/WH	240/50	4	360/400/380	3000/4000/6000	> 80	50°	Optional	White
STR3/4863TC/BK	240/50	4	360/400/380	3000/4000/6000	> 80	50°	Optional	Black




Dimensions



Photometric Data STR3/4863TC at 3000K

Unit: cd C0/C180 — C90/C270



For terms of catalogue data use, refer to INDEX



sal.net.au

367





TC SELECTABLE COLOUR

UNITREK STR3/9017 TC - 15W

15 watt architectural, three circuit track spot

Application

Ideal for decorative interior and retail designs

Design Specifications

- Architectural cylindrical shape, 350° horizontal rotation
- Durable Polyamide body profile, colour white or black
- High efficiency LED optics, CRI >80, CCT selectable 3000K/4000K/5700K
- Multi-faceted reflector system, standard beam distribution 40°
- 15 watt integral dimmable LED driver
- Optional black or white baffle available

Performance

- Dimmable, trailing edge




Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimension (Ø x H mm)
STR3/9017/15TC/WH	240/50	15	1000/1150/1100	3000/4000/5700	40°	White	Ø 70 x 140
STR3/9017/15TC/BK	240/50	15	1000/1150/1100	3000/4000/5700	40°	Black	Ø 70 x 140




Dimensions



Photometric Data STR3/9017/15TC at 3000K

Unit: cd C0/C180 — C90/C270



TC SELECTABLE COLOUR

DUAL POWER

UNITREK STR3/9017 TC/DP - 21W/30W

30 watt architectural, three circuit track spot, with selectable power and CCT

Application

Ideal for decorative interior and retail designs

Design Specifications

- Architectural cylindrical shape, 350° horizontal rotation
- Durable Polyamide body profile, colour white or black
- High efficiency LED optics, CRI >80, CCT selectable 3000K/4000K/5700K
- Multi-faceted reflector system, standard beam distribution 40°
- Optional black or white baffle available

Performance

- Non-dimmable




Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimension (Ø x H mm)
STR3/9017/30TC/DP/WH	240/50	21/30	1600/1900/1700 2100/2400/2200	3000/4000/5700	40°	White	Ø 90 x 210
STR3/9017/30TC/DP/BK	240/50	21/30	1600/1900/1700 2100/2400/2200	3000/4000/5700	40°	Black	Ø 90 x 210




Dimensions




Photometric Data STR3/9017/30TC/DP at 3000K

Unit: cd C0/C180 — C90/C270





 SAL National Pty Ltd - 40 Biloela St, Villawood NSW 2163

 + 61 2 9723 3099

 www.sal.net.au

 info@sal.net.au

 VICT/TAS - 46/48 Keys Road Moorabbin VIC 3189

 + 61 3 9532 3168

 info@sal.net.au

 QLD - 36 Whitelaw Place Richlands QLD 4077

 + 61 7 3879 5999

 info@sal.net.au

 SA/NT - Unit 1, 9 Alfred Avenue Beverley SA 5009

 +61 8 7084 1958

 info@sal.net.au

 WA - 29 Beringarra Avenue Malaga WA 6090

 +61 8 9248 7458

 info@sal.net.au



2024/25

