



SINCE 1998



2024/25

**SMARTER
LIGHTING
CHOICES**



A robust range of residential, commercial and industrial LED bulkheads with optional sensor control.





BRONX SE7089 - 55W

Vandal resistant, IP65 LED wall mount luminaire, IK10 rated

Application


A robust solution for commercial exterior spaces and security



Design Specifications

- Die-cast aluminium body
- Durable black powder coat finish
- UV stabilized opal polycarbonate diffuser
- High efficiency LED optics
- Integral non-dimmable LED driver, prewired with 450mm of 3 x core rubber flex

Dimensions

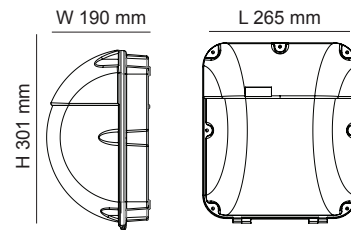


Performance

- Non-dimmable
- Sensor - optional, microwave




Photometric Data SE7089BK at 5000K

Unit: cd C0/C180 — C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimmable	Fitting Colour
SE7089BK	240/50	55	4500	5000	> 70	No	Black

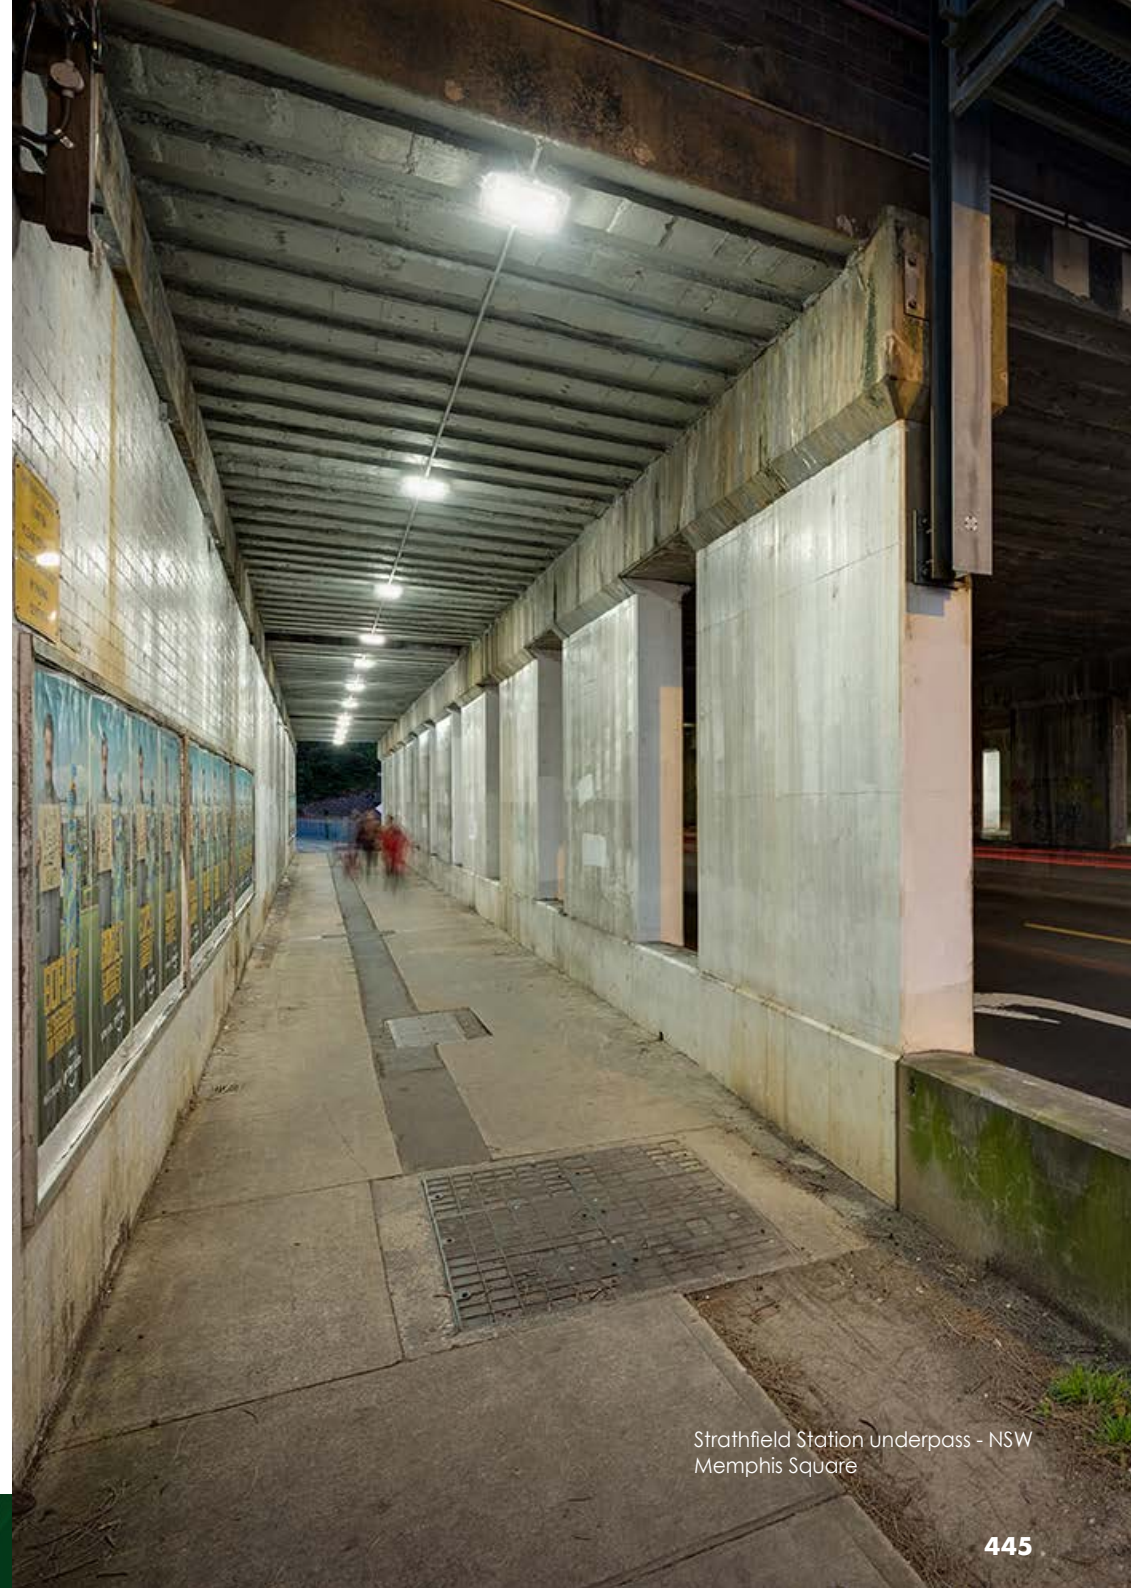

Strathfield Station underpass - NSW
Memphis Square





TC SELECTABLE COLOUR

BUNKER 15 OVAL SL7271TC - 15W

LED 15 watt surface mount oval shaped bunker, selectable CCT, IP65

Application


A robust solution for residential and apartment interior or (covered eave) exterior utility spaces

Design Specifications

- Durable white or black polycarbonate body, opal polycarbonate diffuser
- Integral control gear, 15 watt
- CRI >80, 1400/1500/1450lm
- Selectable CCT 3000/4000/6500
- Quick connect installation design
- Robust IK06 protection, wall or ceiling mount



Dimensions

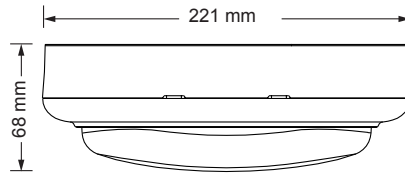

Performance

- Non-dimmable




Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimensions (L x W x H mm)
SL7271TC/WH	240/50	15	1400/1500/1450	3000/4000/6500	110°	White	221 x 131 x 68
SL7271TC/BK	240/50	15	1400/1500/1450	3000/4000/6500	110°	Black	221 x 131 x 68

Photometric Data

SL7271TC at 4000K

Unit: cd C0/C180 — C90/C270



TC SELECTABLE COLOUR

BUNKER 15 OVAL WITH SENSOR SL7271TC/S - 15W

LED 15 watt surface mount oval shaped bunker, selectable CCT, IP54 with PIR sensor

Application


A robust solution for residential and apartment interior or (covered eave) exterior utility spaces

Design Specifications

- Durable white or black polycarbonate body, opal polycarbonate diffuser
- Integral control gear, 15 watt
- PIR sensor control, fixed 30 seconds ON
- Detection distance 7 metres diameter at 2.5hm, daylight threshold <20 lux
- CRI >80, 1400/1500/1450lm
- Selectable CCT 3000/4000/6500
- Quick connect installation design
- Robust IK06 protection, wall or ceiling mount



Dimensions

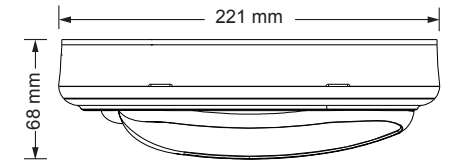

Performance

- Non-dimmable




Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimensions (L x W x H mm)
SL7271TC/WH/S	240/50	15	1400/1500/1450	3000/4000/6500	110°	White	221 x 131 x 68
SL7271TC/BK/S	240/50	15	1400/1500/1450	3000/4000/6500	110°	Black	221 x 131 x 68

Photometric Data

SL7271TC/WH/S at 4000K

Unit: cd C0/C180 — C90/C270





TC SELECTABLE COLOUR

BUNKER 15 ROUND SL7272TC - 15W

LED 15 watt surface mount round shaped bunker, selectable CCT, IP65

Application


A robust solution for residential and apartment interior or (covered eave) exterior utility spaces

Design Specifications

- Durable white or black polycarbonate body, opal polycarbonate diffuser
- Integral control gear, 15 watt
- CRI >80, 1350/1450/1400lm
- Selectable CCT 3000 /4000 / 6500K
- Quick connect installation design
- Robust IK06 protection, wall or ceiling mount




Dimensions

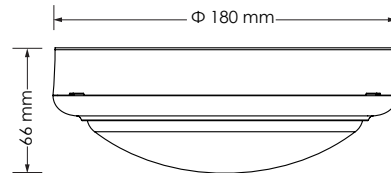

Photometric Data SL7272CW/WH at 4000K

Unit: cd C0/C180 — C90/C270 —



Performance

- Non-dimmable



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimensions (D x H mm)
SL7272TC/WH	240/50	15	1350/1450/1400	3000/4000/6500	110°	White	Φ 180 x 66
SL7272TC/BK	240/50	15	1350/1450/1400	3000/4000/6500	110°	Black	Φ 180 x 66



TC SELECTABLE COLOUR

BUNKER 15 ROUND WITH SENSOR SL7272TC/S - 15W

LED 15 watt surface mount round shaped bunker, selectable CCT, IP54 with PIR sensor

Application


A robust solution for residential and apartment interior or (covered eave) exterior utility spaces

Design Specifications

- Durable white or black polycarbonate body, opal polycarbonate diffuser
- Integral control gear, 15 watt with PIR sensor control, fixed 30 seconds ON
- Detection distance 7 metres diameter at 2.5hm, daylight threshold < 20 lux
- CRI >80, 1350/1450/1400lm, selectable CCT
- Quick connect installation design
- Robust IK06 protection, wall or ceiling mount




Dimensions

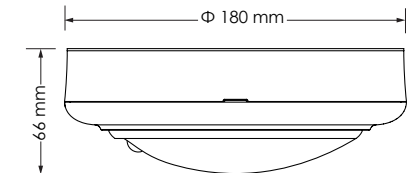

Photometric Data SL7272CW/WH/S at 4000K

Unit: cd C0/C180 — C90/C270 —



Performance

- Non-dimmable



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimensions (D x H mm)
SL7272TC/WH/S	240/50	15	1350/1450/1400	3000/4000/6500	110°	White	Φ 180 x 66
SL7272TC/BK/S	240/50	15	1350/1450/1400	3000/4000/6500	110°	Black	Φ 180 x 66





TC SELECTABLE COLOUR

COOPER SE7081 TC - 16W

16 watt, IP65 LED commercial bunker luminaire, selectable CCT, IK10 rated, ceiling or wall mount

Application


A decorative architectural solution for commercial exteriors



Design Specifications

- Robust die-cast aluminium body, durable black or silver powder coat finish
- Stainless steel allen screws
- High efficiency LED optics
- Integral non-dimmable LED driver
- Selectable CCT 3000 / 4000 / 5700K
- Optional Emergency models available

Dimensions




Performance

- Sensor - optional microwave



Photometric Data SE7081TC at 3000K

Unit: cd C0/C180 — C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimensions (D x H mm)
SE7081TC/BK	240/50	16	1100/1150/1100	3000/4000/5700	100°	Black	Φ 265 x 85
SE7081TC/SL	240/50	16	1100/1150/1100	3000/4000/5700	100°	Silver	Φ 265 x 85



TC SELECTABLE COLOUR

COOPER SE7082 TC - 16W

16 watt, IP65 LED commercial bunker luminaire, selectable CCT, IK10 rated, ceiling or wall mount

Application


A decorative architectural solution for commercial exteriors



Design Specifications

- Robust die-cast aluminium body, durable black or silver powder coat finish
- Stainless steel allen screws
- High efficiency LED optics
- Integral non-dimmable LED driver
- Selectable CCT 3000 / 4000 / 5700K
- Optional Emergency models available

Dimensions




Performance

- Sensor - optional microwave



Photometric Data SE7082TC at 3000K

Unit: cd C0/C180 — C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimensions (D x H mm)
SE7082TC/BK	240/50	16	1100/1150/1100	3000/4000/5700	100°	Black	Φ 265 x 95
SE7082TC/SL	240/50	16	1100/1150/1100	3000/4000/5700	100°	Silver	Φ 265 x 95





COOPER SE7083 TC - 23W

23 watt, IP65 LED commercial bunker luminaire, selectable CCT, IK10 rated, ceiling or wall mount

Application


A decorative architectural solution for commercial exteriors



Design Specifications

- Robust die-cast aluminium body, durable black or silver powder coat finish
- Stainless steel allen screws
- High efficiency LED optics
- Integral non-dimmable LED driver
- Selectable CCT 3000 / 4000 / 5700K
- Optional Emergency models available

Dimensions




Performance

- Sensor - optional microwave
- Dimming - optional trailing edge



Photometric Data SE7083TC at 3000K

Unit: cd C0/C180 — C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimensions (D x H mm)
SE7083TC/BK	240/50	23	1400/1500/1500	3000/4000/5700	100°	Black	Φ 350 x 130
SE7083TC/SL	240/50	23	1400/1500/1500	3000/4000/5700	100°	Silver	Φ 350 x 130



COOPER SE7084 TC - 23W

23 watt, IP65 LED commercial bunker luminaire, selectable CCT, IK10 rated, ceiling or wall mount

Application


A decorative architectural solution for commercial exteriors



Design Specifications

- Robust die-cast aluminium body, durable black or silver powder coat finish
- Stainless steel allen screws
- High efficiency LED optics
- Integral non-dimmable LED driver
- Selectable CCT 3000 / 4000 / 5700K
- Optional Emergency models available

Dimensions




Performance

- Sensor - optional microwave
- Dimming - optional trailing edge



Photometric Data SE7084TC at 3000K

Unit: cd C0/C180 — C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimensions (D x H mm)
SE7084TC/BK	240/50	23	1400/1500/1500	3000/4000/5700	100°	Black	Φ 350 x 145
SE7084TC/SL	240/50	23	1400/1500/1500	3000/4000/5700	100°	Silver	Φ 350 x 145





TC SELECTABLE COLOUR

COOPER II SE7181 TC - 12W

Decorative 12 watt round profile IP65 architectural LED wall or ceiling mount luminaire, with selectable CCT




Application

A decorative architectural solution for residential & commercial interior or exterior spaces

Design Specifications


- Selectable CCT 3000K / 4000K / 5700K
- Robust die-cast aluminium body profile, durable black powder coated finish
- Integral non-dimmable control gear, 12 watt
- High efficiency LED optics

Dimensions



Photometric Data SE7181TC/BK at 3000K

Unit: cd C0/C180 — C90/C270



Performance

- Non-dimmable



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour	Dimensions (D x H mm)
SE7181TC/BK	240/50	12	1000/1200/1100	3000/4000/5700	> 80	Black	∅ 250 x 58



TC SELECTABLE COLOUR

COOPER II SE7182 TC - 12W

Decorative 12 watt round profile IP65 architectural LED wall mount luminaire, with selectable CCT




Application

A decorative architectural solution for residential & commercial interior or exterior spaces

Design Specifications


- Stylish eyelid design
- Selectable CCT 3000K / 4000K / 5700K
- Robust die-cast aluminium body profile, durable black powder coated finish
- Integral non-dimmable control gear, 12 watt
- High efficiency LED optics

Dimensions

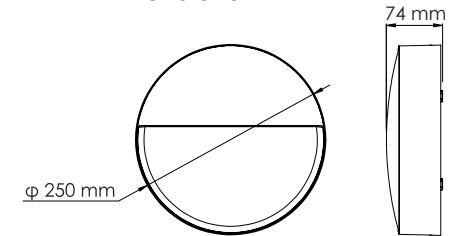

Photometric Data SE7182TC/BK at 3000K

Unit: cd C0/C180 — C90/C270



Performance

- Non-dimmable



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour	Dimensions (D x H mm)
SE7182TC/BK	240/50	12	900/1100/1000	3000/4000/5700	> 80	Black	∅ 250 x 74

For terms of catalogue data use, refer to INDEX





COOPER III SE7191 TC - 12W

Decorative 12 watt round profile IP65 architectural LED wall or ceiling mount luminaire, with selectable CCT

Application


A decorative architectural solution for residential & commercial interior or exterior spaces



Design Specifications

- Selectable CCT 3000K / 4000K / 5700K
- Stylish black finish
- Integral non-dimmable LED control gear, 12 watt
- Robust PC body profile and diffuser
- High efficiency LED optics

Dimensions




Performance

- Non-dimmable



Photometric Data SE7191TC/BK at 3000K

Unit: cd C0/C180 — C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour	Dimensions (D x H mm)
SE7191TC/BK	240/50	12	1050/1150/1100	3000/4000/5700	> 80	Black	Ø200 x H60



COOPER III SE7192 TC - 18W

Decorative 18 watt round profile IP65 architectural LED wall or ceiling mount luminaire, with selectable CCT

Application


A decorative architectural solution for residential & commercial interior or exterior spaces



Design Specifications

- Selectable CCT 3000K / 4000K / 5700K
- Stylish black finish
- Integral non-dimmable control gear, 18 watt
- Robust PC body profile and diffuser
- High efficiency LED optics
- Optional (wall mount) eyelid cover to order, code SE7192TC/BK/P
- Optional Emergency models available

Dimensions




Performance

- Non-dimmable



Photometric Data SE7192TC/BK at 3000K

Unit: cd C0/C180 — C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour	Dimensions (D x H mm)
SE7192TC/BK	240/50	18	1600/1800/1750	3000/4000/5700	> 80	Black	Ø275 x H60





MEMPHIS ROUND SL9719RD - 22W

Vandal resistant, IP65 LED round profile, wall or ceiling mount luminaire, IK10 rated

Application

A robust solution for industrial and commercial spaces

Design Specifications


- Die-cast aluminium body with a frosted polycarbonate diffuser
- Stainless steel allen screws
- High efficiency LED optics
- Integral non-dimmable LED driver
- Designed with multi access rear or side conduit entry points
- Non-dimmable corridorSTANDBY options
- Product selections compliant to AS/NZS2293 Emergency Lighting & Exit Signs are located in the exterior emergency section of this catalogue.

Performance

- Dimmable - optional, trailing edge, DALI/DSI
- Sensor - optional, microwave




Dimensions

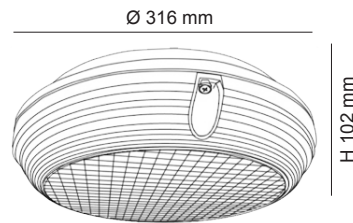

Photometric Data SL9719RD at 4000K

Unit: cd C0/C180 — C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimmable	Fitting Colour
SL9719RD	240/50	22	1700	4000	> 80	Optional	White
SL9719RD/C	240/50	22	1700	4000	> 80	Optional	White



MEMPHIS SQUARE SL9719SQ - 22W

Vandal resistant, IP65 LED square profile, wall or ceiling mount luminaire, IK10 rated

Application

A robust solution for industrial and commercial spaces

Design Specifications


- Die-cast aluminium body with a frosted polycarbonate diffuser
- Stainless steel allen screws
- High efficiency LED optics
- Integral non-dimmable LED driver
- Designed with multi access rear or side conduit entry points
- Non-dimmable corridorSTANDBY options
- Product selections compliant to AS/NZS2293 Emergency Lighting & Exit Signs are located in the exterior emergency section of this catalogue

Performance

- Dimmable - optional, trailing edge, DALI/DSI
- Sensor - optional, microwave




Dimensions

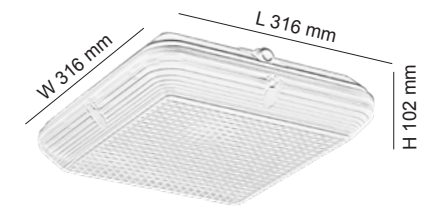

Photometric Data SL9719SQ at 4000K

Unit: cd C0/C180 — C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimmable	Fitting Colour
SL9719SQ	240/50	22	1700	4000	> 80	Optional	White
SL9719SQ/C	240/50	22	1700	4000	> 80	Optional	White

For terms of catalogue data use, refer to INDEX





REC-BUNKER SE7087L - 18W

Vandal resistant, IP54 LED bunker ceiling mount luminaire, IK10 rated

Application


A reliable solution for commercial or industrial utility spaces

Design Specifications

- Robust die-cast aluminium body
- Durable white powder coat finish
- Stainless steel allen screws
- High efficiency LED optics, beam distribution 90°
- Integral non-dimmable LED driver
- UV stabilized opal polycarbonate diffuser and silicone gasket



Dimensions




Performance

- Dimmable - optional, trailing edge



Photometric Data SE7087L at 4000K

Unit: cd C0/C180 — C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
SE7087L	240/50	18	1450	4000	> 80	90°	Optional	White



IK ratings , why are they important?



An IK rating of a lighting product is covered by BS EN 62262 and is a measure of the impact resistance of a product.


The test process measures a products mechanical impact (impact energy joules) limits, against a known mass and varied distances.


As a guide, the higher the IK rating (limit IK10), the higher the products ability to withstand impact forces. For example, an IK10 rated product would be seen in harsh environments, such as vandal prone installations or correctional centres.

IK RATING CHART

IK00 No protection	IK05 Protected against 0.7 joules of impact (equivalent of a 0.25 kg object dropped from a height of 280mm).
IK01 Protected against 0.14 joules of impact (equivalent of a 0.25 kg object dropped from a height of 56mm).	IK06 Protected against 1 joules of impact (equivalent of a 0.25 kg object dropped from a height of 400mm).
IK02 Protected against 0.2 joules of impact (equivalent of a 0.25 kg object dropped from a height of 80mm).	IK07 Protected against 2 joules of impact (equivalent of a 0.5 kg object dropped from a height of 400mm).
IK03 Protected against 0.35 joules of impact (equivalent of a 0.25 kg object dropped from a height of 140mm).	IK08 Protected against 5 joules of impact (equivalent of a 1.7 kg object dropped from a height of 300mm).
IK04 Protected against 0.5 joules of impact (equivalent of a 0.25 kg object dropped from a height of 200mm).	IK09 Protected against 10 joules of impact (equivalent of a 5.0 kg object dropped from a height of 200mm).
	IK10 Protected against 20 joules of impact (equivalent of a 5.0 kg object dropped from a height of 400mm).



 SAL National Pty Ltd - 40 Biloela St, Villawood NSW 2163

 + 61 2 9723 3099

 www.sal.net.au


 info@sal.net.au

 VICT/TAS - 46/48 Keys Road Moorabbin VIC 3189

 + 61 3 9532 3168

 info@sal.net.au

 QLD - 36 Whitelaw Place Richlands QLD 4077

 + 61 7 3879 5999

 info@sal.net.au

 SA/NT - Unit 1, 9 Alfred Avenue Beverley SA 5009

 +61 8 7084 1958

 info@sal.net.au

 WA - 29 Beringarra Avenue Malaga WA 6090

 +61 8 9248 7458

 info@sal.net.au



2024/25

